






DIN 7991 ISO10642 Havşa Başlı İmbus
Hexagon socket countersunk head cap screws

DIN 7991;
CSN 21343;
PN 82418;

* 8.8. Çelik
* 10,9 Çelik
* 12,9 Çelik
* A2 304
* A4 316

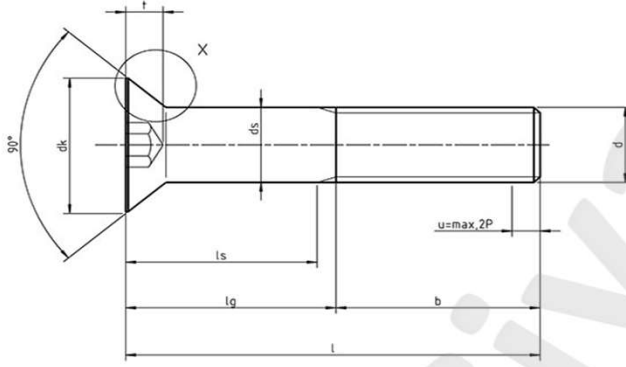

Ölçü d	M3	M4	M5	M6	M8	M10	M12	(M14)	M16	(M18)	M20	(M22)	M24
Diş Adımı	0,50	0,70	0,80	1,00	1,25	1,50	1,75	2,00	2,00	2,50	2,50	2,50	3,00
b l?125mm	12,00	14,00	16,00	18,00	22,00	26,00	30,00	34,00	38,00	42,00	46,00	50,00	54,00
b 125<l?200	-	-	-	24,00	28,00	32,00	36,00	40,00	44,00	48,00	52,00	56,00	60,00
b l>200mm	-	-	-	-	-	45,00	49,00	53,00	57,00	61,00	65,00	69,00	73,00
c	0,20	0,30	0,30	0,30	0,40	0,50	0,50	0,50	0,50	0,50	0,50	1,00	1,00
dk max.	6,00	8,00	10,00	12,00	16,00	20,00	24,00	27,00	30,00	33,00	36,00	36,00	39,00
dk min.	5,70	7,64	9,64	11,57	15,57	19,48	23,48	26,48	29,48	32,38	35,38	35,38	38,38
da max.	3,60	4,70	5,70	6,80	9,20	11,20	13,70	15,70	17,70	20,20	22,40	24,40	26,40
ds max.	3,00	4,00	5,00	6,00	8,00	10,00	12,00	14,00	16,00	18,00	20,00	22,00	24,00
ds min.	2,86	3,82	4,82	5,82	7,78	9,78	11,73	13,73	15,73	17,73	19,67	21,67	23,67
e min.	2,30	2,87	3,44	4,58	5,72	6,86	9,15	11,43	11,43	13,72	13,72	16,00	16,00
k max.	1,70	2,30	2,80	3,30	4,40	5,50	6,50	7,00	7,50	8,00	8,50	13,10	14,00
r min.	0,10	0,20	0,20	0,30	0,50	0,50	1,00	1,00	1,00	1,00	1,00	1,00	1,60
s	2,00	2,50	3,00	4,00	5,00	6,00	8,00	10,00	10,00	12,00	12,00	14,00	14,00
s min.	2,02	2,52	3,02	4,02	5,02	6,02	8,03	10,03	10,03	12,03	12,03	14,03	14,03
s max.	2,10	2,60	3,10	4,12	5,14	6,14	8,18	10,18	10,18	12,21	12,21	14,21	14,21
t	1,20	1,80	2,30	2,50	3,50	4,40	4,60	4,80	5,30	5,50	5,90	8,80	10,30
t min.	0,95	1,50	2,05	2,25	3,20	4,10	4,30	4,50	5,00	5,20	5,60	8,44	9,87