




DIN94 ISO 1234 KOPİLYA

DIN94;
ISO 1234;
CSN 21781;
PN 82001;
UNI 1336;

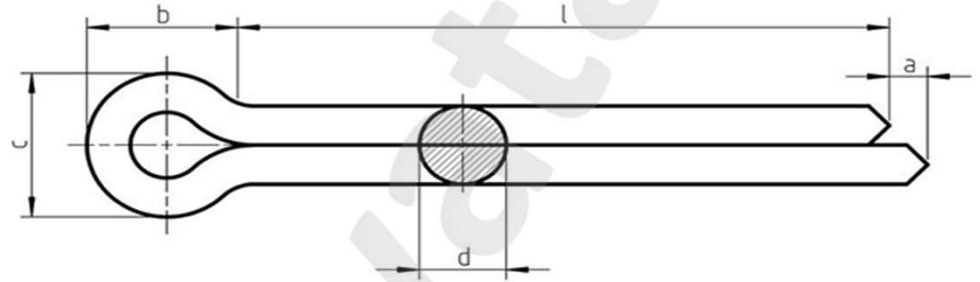

d	a max.	b	c max.
0,6	1,60	2,00	1,00
0,8	1,60	2,40	1,40
1	1,60	3,00	1,80
1,2	2,50	3,00	2,00
1,6	2,50	3,20	2,80
2	2,50	4,00	3,60
2,5	2,50	5,00	4,60
3,2	3,20	6,40	5,80
4	4,00	8,00	7,40
5	4,00	10,00	9,20
6,3	4,00	12,60	11,80
8	4,00	16,00	15,00
10	6,30	20,00	19,00
13	6,30	26,00	24,80
16	6,30	32,00	30,80
20	6,30	40,00	38,50