




DIN 444 GÖZLÜ CİVATA

Eyebolts

CSN 021167;

PN 82425;

UNI 6058;

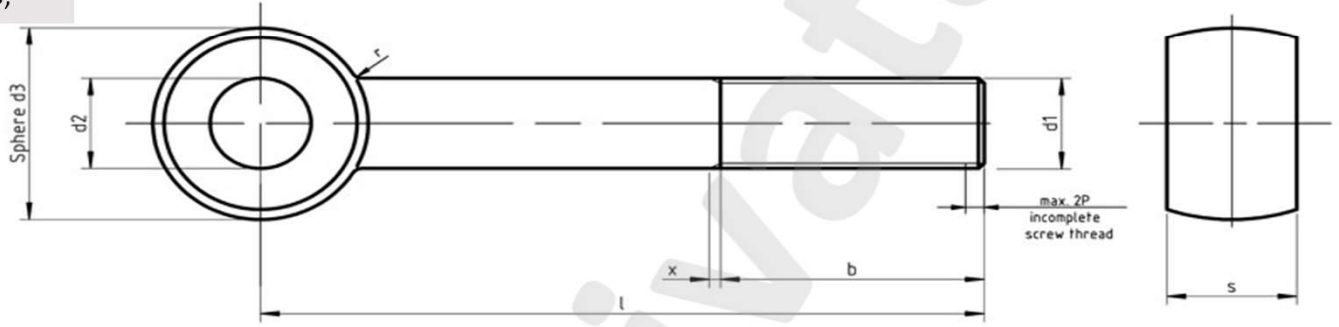

Type A (product grade C = design g)
Type B (product grade B = design mg)
Type C (product grade A = design m)

d1	M5	M6	M8	M10	M12	M16	M20	M24	M30	M36
p	0,80	1,00	1,25	1,50	1,75	2,00	2,50	3,00	3,50	4,00
b	16,00	18,00	22,00	26,00	30,00	38,00	46,00	54,00	66,00	-
b	-	-	28,00	32,00	36,00	44,00	52,00	60,00	72,00	84,00
b	-	-	-	-	49,00	57,00	65,00	73,00	85,00	97,00
d2 H9	5,00	6,00	8,00	10,00	12,00	16,00	18,00	22,00	27,00	32,00
d3 max.	12,00	14,00	18,00	20,00	25,00	32,00	40,00	45,00	55,00	65,00
min.	10,90	12,90	16,90	18,70	23,70	30,40	38,40	43,40	53,10	63,10
Type A	11,57	13,57	17,57	19,48	24,48	31,38	39,38	44,38	54,26	64,26
min. Type B and C	2,50	4,00	4,00	4,00	6,00	6,00	6,00	10,00	10,00	16,00
r	8,00	9,00	11,00	14,00	17,00	19,00	24,00	28,00	34,00	41,00
s Type A	7,52	8,52	10,30	13,30	16,30	18,16	23,16	27,16	33,00	40,00
max. Type A min.	6,00	7,00	9,00	12,00	14,00	17,00	22,00	25,00	30,00	38,00
Type B and C	5,88	6,85	8,85	11,82	13,82	16,82	21,79	24,79	29,79	37,75
max. Type B and C										
min.										