




ISO 14583 SİLİNDİR BAŞLI TORKS VİDA

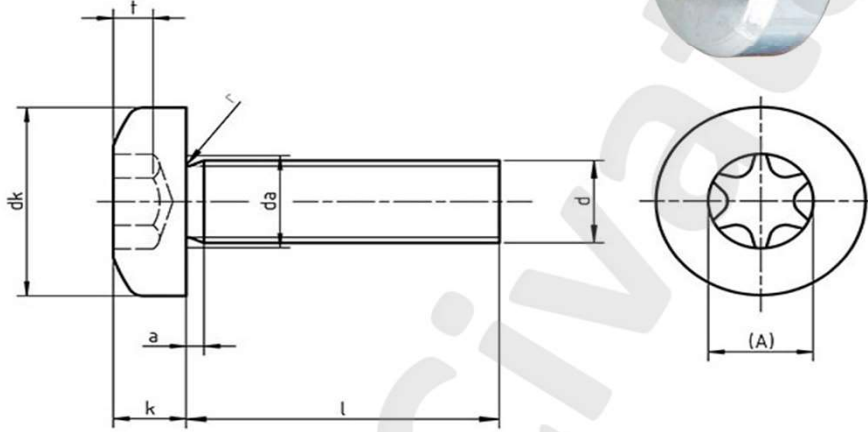

Ölçü d	M3	M3,5	M4	M5	M6	M8
Diş Adımı	0,50	0,60	0,70	0,80	1,00	1,25
a max.	1,00	1,20	1,40	1,60	2,00	2,50
b min.	25,00	38,00	38,00	38,00	38,00	38,00
da max.	3,60	4,10	4,70	5,70	6,80	9,20
dk max.	5,60	7,00	8,00	9,50	12,00	16,00
dk min.	5,30	6,64	7,64	9,14	11,57	15,57
k max.	2,40	2,60	3,10	3,70	4,60	6,00
k min.	2,26	2,46	2,92	3,52	4,30	5,70
r min.	0,10	0,10	0,20	0,20	0,25	0,40
rf	5,00	6,00	6,50	8,00	10,00	13,00
x	1,25	1,50	1,75	2,00	2,50	3,20
Tx	10,00	15,00	20,00	25,00	30,00	45,00