





DIN 7344 DIN-EN-ISO 8748 SARMAL PİM

DIN 7344;
ISO 8748;
CSN 022163;
UNI 6876;

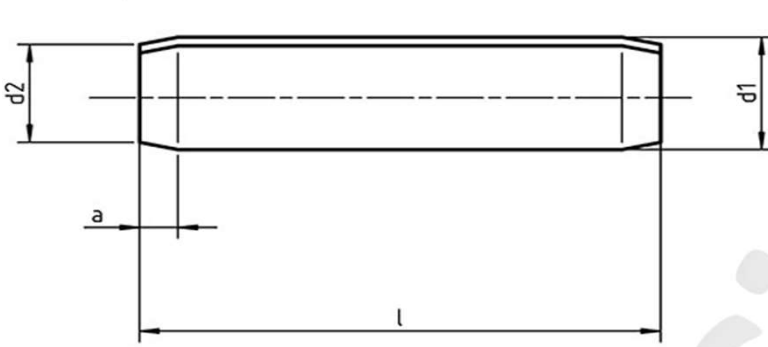

d1	d1 max.	d1 min.	d2	a	s	a	b
1,5	1,71	1,61	1,40	0,50	0,17	1,90	1,45
2	2,21	2,11	1,90	0,70	0,22	3,50	2,50
2,5	2,73	2,62	2,40	0,70	0,28	5,50	3,80
3	3,25	3,12	2,90	0,90	0,33	7,60	5,70
3,5	3,79	3,64	3,40	1,00	0,39	10,00	7,60
4	4,30	4,15	3,90	1,10	0,45	13,50	10,00
5	5,35	5,15	4,85	1,30	0,56	20,00	15,50
6	6,40	6,18	5,85	1,50	0,67	30,00	23,00
8	8,55	8,25	7,80	2,00	0,90	53,00	41,00
10	10,65	10,30	9,75	2,50	1,10	84,00	64,00
12	12,75	12,35	11,70	3,00	1,30	120,00	91,00
14	14,85	14,40	13,60	3,50	1,60	165,00	-
16	16,90	16,40	15,60	4,00	1,80	210,00	-
20	21,00	20,40	19,60	4,50	2,20	340,00	-