




BRTx 32

- ✓ Plastikte zedelemeyen vidalama
- ✓ Minimal Radyal Gerilmeler
- ✓ Statik ve dinamik yük durumunda vidanın uzun hizmet ömrü
- ✓ Gevşemeyi önlenmesi
- ✓ Ekonomik, pratik ve her türlü dış etkenlere dayanıklıdır

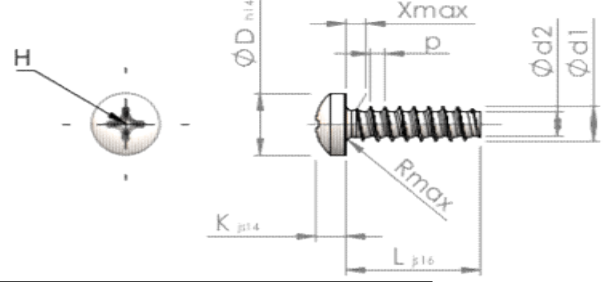

d1	2,20 +0,08	2,50 +0,10	3,00 +0,10	3,50 +0,10	4,00 +0,10	4,50 +0,10	5,00 +0,15	6,00 +0,15
d2	1,51	1,72	2,09	2,45	2,81	3,17	3,53	4,26
p	0,85	0,95	1,12	1,29	1,46	1,63	1,8	2,14
D	3,90 -0,30	4,40 -0,30	5,30 -0,30	6,10 -0,36	7,00 -0,36	7,50 -0,36	8,80 -0,36	10,50 -0,43
K	1,600 ±0,125	1,900 ±0,125	2,300 ±0,125	2,700 ±0,125	3,100 ±0,150	3,200 ±0,150	3,500 ±0,150	4,200 ±0,150
X max.	1,1	1,3	1,5	1,8	2	2,3	2,5	3
R max.	0,35	0,4	0,5	0,5	0,6	0,6	0,7	0,8
H-Yıldız	1	1	1	2	2	2	2	3
t min.	0,74	0,92	1,19	1,23	1,51	1,51	2,12	2,44
t max.	1,2	1,38	1,65	1,86	2,14	2,14	2,75	3,1