




DIN 434 KARE KONİK PUL

DIN 434 ;
CSN 21739;
PN 82018;
UNI 6598;

* ST Çelik,
* A2 304
* A4 316

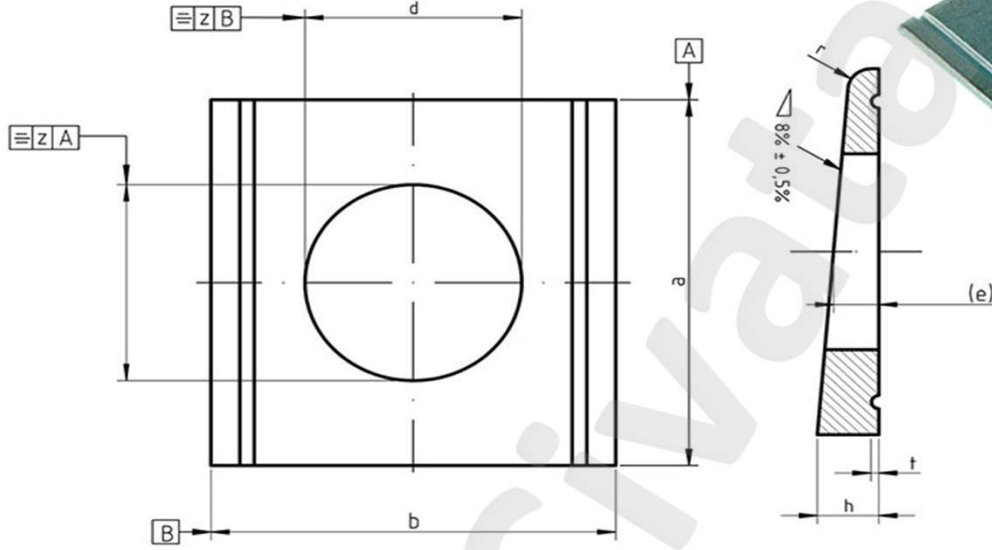

Anma Ölçü	M8	M10	M12	M16	M20	M22	M24	M27
d1	9,00	11,00	13,50	17,50	22,00	24,00	26,00	30,00
d1 min.	9,00	11,00	13,50	17,50	22,00	24,00	26,00	30,00
d1 max.	9,36	11,43	13,93	17,93	22,52	24,52	26,52	30,52
a	22,00	22,00	26,00	32,00	40,00	44,00	56,00	56,00
a min.	20,00	20,00	24,00	29,50	37,50	41,50	53,00	53,00
a max.	24,00	24,00	28,00	34,50	42,50	46,50	59,00	59,00
b	22,00	22,00	30,00	36,00	44,00	50,00	56,00	56,00
b min.	21,35	21,35	29,35	35,20	43,20	49,20	55,05	55,05
b max.	22,65	22,65	30,65	36,80	44,80	50,80	56,95	56,95
e	2,90	2,90	3,70	4,45	5,25	6,00	6,26	6,26
h	3,80	3,80	4,90	5,90	7,00	8,00	8,50	8,50
h min.	3,20	3,20	3,90	4,90	6,00	7,00	7,30	7,30
h max.	4,40	4,40	5,90	6,90	8,00	9,00	9,70	9,70
r	1,60	1,60	2,00	2,40	2,80	3,20	3,20	3,20
t	0,50	0,50	0,70	0,80	0,90	1,00	1,00	1,00
z	1,68	1,68	1,68	2,00	2,00	2,00	3,80	3,80