



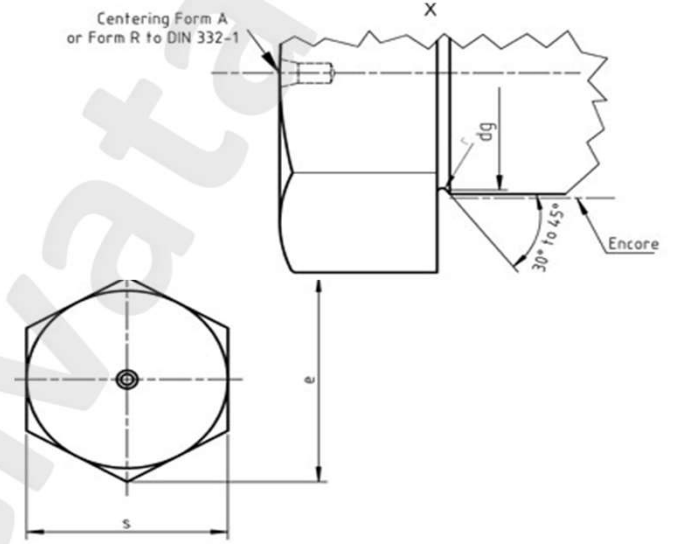

DIN 610 Yarım Dış Şaft Kalın Altıköşe Cıvata
Hexagon fit bolts with short threaded portion

DIN 610
CSN 21112;
PN 82341;

* 8.8 Çelik
* 10.9 Çelik

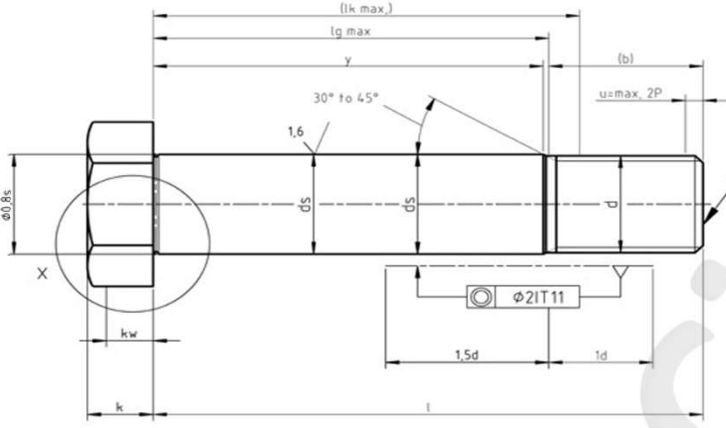

Ölçü d	M8	M10	M12	(M14)	M16	(M18)	M20
Ölçü d	-	-	-	-	-	(M18x1,5)	M20x1,5
Ölçü d	-	-	-	-	-	(M18x2)	M20x2
b l?50mm	11,50	13,50	15,50	17,00	19,00	21,50	22,50
b 50<l?150mm	13,50	15,50	17,50	19,00	21,00	23,50	24,50
b l>150mm	18,50	20,50	22,50	24,00	26,00	28,50	29,50
ds k6	9,00	11,00	13,00	15,00	17,00	19,00	21,00
dg min.	7,90	9,90	11,50	13,50	15,50	17,50	19,10
dg max.	8,20	10,20	11,80	13,80	15,80	17,80	19,40
min.	14,38	17,77	18,90	19,85	20,88	22,78	23,91
k	5,30	5,40	7,50	8,80	10,00	11,50	12,50
k min.	5,15	5,22	7,21	8,51	9,71	11,15	12,15
k max.	5,45	6,58	7,79	9,09	10,29	11,85	12,85
r min.	0,40	0,40	0,60	0,60	0,60	0,80	0,90
r max.	0,55	0,55	0,75	0,75	0,75	0,75	0,95
s	13,00	16,00	17,00	18,00	19,00	21,00	22,00
s min.	12,73	15,73	16,73	17,57	18,48	20,16	21,16