




DIN 6914 ISO 7411 Anahtar Başlı Konstrüksiyon Civataları
High-strength injection structural bolts

DIN 6914;
ISO 7411;
PN 82343;
UNI 5712;
EU 781;

* 10,9 Çelik

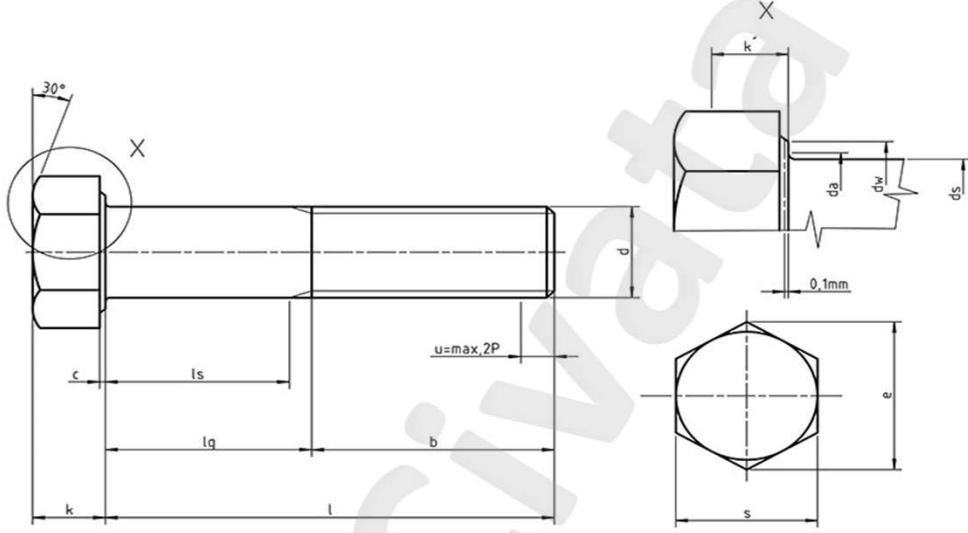

Ölçü d	M12	M16	M20	M22	M24	M27	M30	M36
Diş Adımı	1,75	2,00	2,50	2,50	3,00	3,00	3,50	4,00
b	21,00	26,00	31,00	32,00	34,00	37,00	40,00	48,00
b	23,00	28,00	33,00	34,00	37,00	39,00	42,00	50,00
c Min.	0,40	0,40	0,40	0,40	0,40	0,40	0,40	0,40
c Max.	0,60	0,60	0,80	0,80	0,80	0,80	0,80	0,80
da Max.	15,20	19,20	24,00	26,00	28,00	32,00	35,00	41,00
ds	12,00	16,00	20,00	22,00	24,00	27,00	30,00	36,00
ds Min.	11,30	15,30	19,16	21,16	23,16	26,16	29,16	35,00
ds Max.	12,70	16,70	20,84	22,84	24,84	27,84	30,84	37,00
dw Min.	20,00	25,00	30,00	34,00	39,00	43,50	47,50	57,00
e Min.	23,91	29,56	35,03	39,55	45,20	50,85	55,37	66,44
k	8,00	10,00	13,00	14,00	15,00	17,00	19,00	23,00
k Min.	7,55	9,25	12,10	13,10	14,10	16,10	17,95	21,95
k Max.	8,45	10,75	13,90	14,90	15,90	17,90	20,05	24,05
r Min.	1,20	1,20	1,50	1,50	1,50	2,00	2,00	2,00
s	22,00	27,00	32,00	36,00	41,00	46,00	50,00	60,00
s Min.	21,16	26,16	31,00	35,00	40,00	45,00	49,00	58,80

