




ANSI / ASME B18.3;

Whitworth Inch İmbus Cıvata

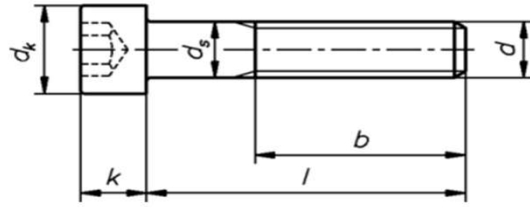

	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm
d	1/8		5/32		3/16		1/4		5/16		3/8		7/16		1/2	
	1/8	3,175	5/32	3,9688	3/16	4,7625	1/4	6,35	5/16	7,9375	3/8	9,525	7/16	11,113	1/2	12,7
p UNC	32		32		24		20		18		16		14		13	
p UNF	32		32		24		28		24		24		20		20	
s	7/64		9/64		5/32		3/16		1/4		5/16		3/8		3/8	
dk	0,226	5,7404	0,27	6,858	0,312	7,9248	0,375	9,525	0,469	11,913	0,562	14,275	0,656	16,662	0,75	19,05
	0,218	5,5372	0,262	6,6548	0,303	7,6962	0,365	9,271	0,457	11,608	0,55	13,97	0,642	16,307	0,735	18,669
k	0,138	3,5052	0,164	4,1656	0,19	4,826	0,25	6,35	0,312	7,9248	0,375	9,525	0,438	11,125	0,5	12,7
	0,134	3,4036	0,159	4,0386	0,185	4,699	0,244	6,1976	0,306	7,7724	0,368	9,3472	0,43	10,922	0,492	12,497
t	0,064	1,6256	0,077	1,9558	0,09	2,286	0,12	3,048	0,151	3,8354	0,182	4,6228	0,213	5,4102	0,245	6,223
b	0,75	19,05	0,88	22,352	0,88	22,352	1	25,4	1,12	28,448	1,25	31,75	1,38	35,052	1,5	38,1

	inch	mm	inch	mm	inch	mm	inch	mm
d	5/8		3/4		7/8		1	
	5/8	15,875	3/4	19,05	7/8	22,225	1	25,4
p UNC	11		10		9		8	
p UNF	18		16		14		12	
s	1/2		5/8		3/4		3/4	
dk	0,938	23,825	1,125	28,575	1,312	33,325	1,5	38,1
	0,921	23,393	1,107	28,118	1,293	32,842	1,479	37,567
k	0,625	15,875	0,75	19,05	0,875	22,225	1	25,4
	0,616	15,646	0,74	18,796	0,964	24,486	0,988	25,095
t	0,307	7,7978	0,37	9,398	0,432	10,973	0,495	12,573
b	1,75	44,45	2	50,8	2,25	57,15	2,5	63,5