



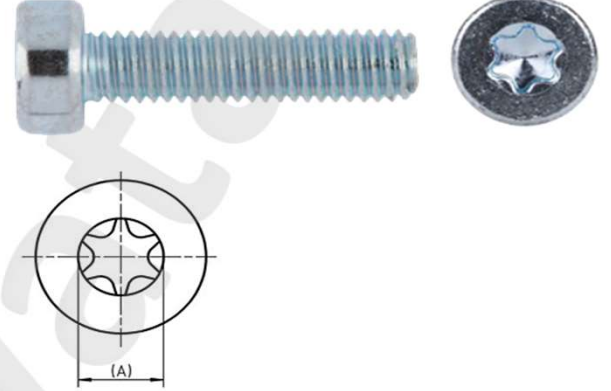

ISO 14580 İNCE KAFA İMBUS TORKS
Cylinder screw low head TORKS drive

- * 8.8 Çelik
- * 10,9 Çelik
- * A2 304
- * A4 316

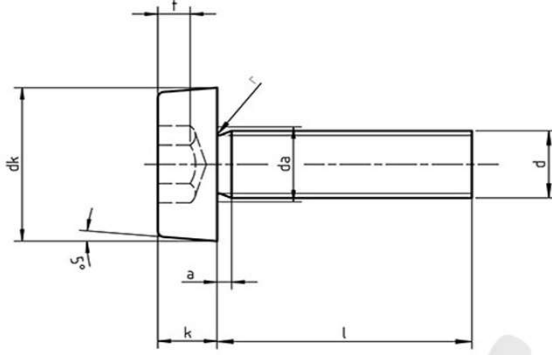

Ölçü D	M2	M2,5	M3	M4	M5	M6	M8	M10
a max.	0,80	0,90	1,00	1,40	1,60	2,00	2,50	3,00
b min.	25,00	25,00	25,00	38,00	38,00	38,00	38,00	38,00
dk max.	3,62	4,32	5,32	6,78	8,28	9,78	12,73	15,73
da max.	2,60	3,10	3,60	4,70	5,70	6,80	9,20	11,20
k max.	1,55	1,85	2,40	3,10	3,65	4,40	5,80	6,90
Torks	6,00	8,00	10,00	20,00	25,00	30,00	45,00	50,00