




ISO 7380 BOMBE BAŞLI İMBUS
Hexagon socket button head screws

- * 10,9 Çelik
- * A2 304
- * A4 316

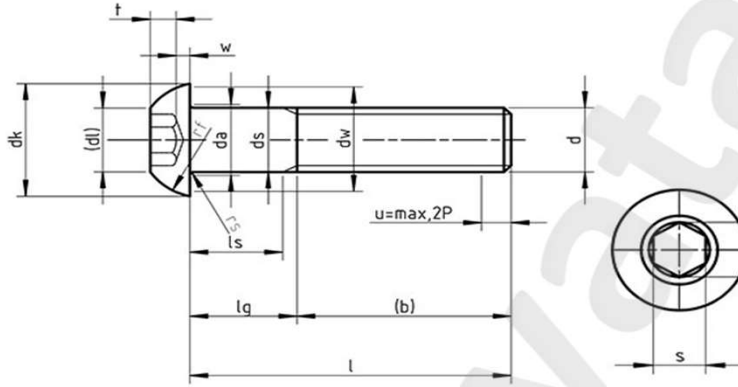

Ölçü d	M3	M4	M5	M6	M8	M10	M12	M16
Diş Adımı	0,50	0,70	0,80	1,00	1,25	1,50	1,75	2,00
b ref.	18,00	20,00	22,00	24,00	28,00	32,00	36,00	44,00
c max.	0,70	0,80	1,00	1,20	1,50	2,00	2,40	2,80
c min.	0,55	0,65	0,80	1,00	1,25	1,70	2,10	2,50
da max.	3,60	4,70	5,70	6,80	9,20	11,20	13,70	17,70
dc max.	6,90	9,40	11,80	13,60	17,80	21,90	26,00	34,00
dc min.	6,32	8,82	11,10	12,90	17,10	21,06	25,16	33,00
dk max.	5,20	7,20	8,80	10,00	13,20	16,50	19,40	26,00
dk min.	4,90	6,80	8,40	9,60	12,80	16,10	18,90	25,50
dL ref.	2,60	3,80	5,00	6,00	7,70	10,00	12,00	16,00
ds max.	3,00	4,00	5,00	6,00	8,00	10,00	12,00	16,00
ds min.	2,86	3,82	4,82	5,82	7,78	9,78	11,73	15,73
dw min.	5,74	8,24	10,40	12,20	16,40	20,22	24,32	32,00
e min.	2,30	2,87	3,44	4,58	5,72	6,86	9,15	11,43
k max.	1,65	2,20	2,75	3,30	4,40	5,50	6,60	8,80
k min.	1,40	1,95	2,50	3,00	4,10	5,20	6,24	8,44
r1 max.	3,70	4,60	5,75	6,15	7,95	9,80	11,20	15,30
r1 min.	3,30	4,20	5,25	5,65	7,45	9,20	10,50	14,50
rs min.	0,10	0,20	0,20	0,25	0,40	0,40	0,60	0,60
rt min.	0,30	0,40	0,45	0,50	0,70	0,70	1,10	1,10
s	2,00	2,50	3,00	4,00	5,00	6,00	8,00	10,00
s max.	2,08	2,58	3,08	4,10	5,14	6,14	8,18	10,18
s min.	2,02	2,52	3,02	4,02	5,02	6,02	8,03	10,03
t min.	1,04	1,30	1,56	2,08	2,60	3,12	4,16	5,20
w min.	0,20	0,30	0,38	0,74	1,05	1,45	1,63	2,25