




### BRTx 31

- ✓ Plastikte zedelemeyen vidalama
- ✓ Minimal Radyal Gerilmeler
- ✓ Statik ve dinamik yük durumunda vidanın uzun hizmet ömrü
- ✓ Gevşemeyi önlenmesi
- ✓ Ekonomik, pratik ve her türlü dış etkenlere dayanıklıdır

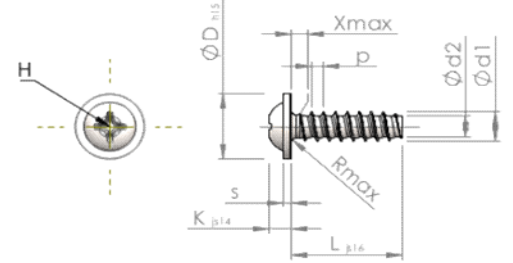

d1	2,20 <sup>+0,08</sup>	2,50 <sup>+0,10</sup>	3,00 <sup>+0,10</sup>	3,50 <sup>+0,10</sup>	4,00 <sup>+0,10</sup>	4,50 <sup>+0,10</sup>	5,00 <sup>+0,15</sup>	6,00 <sup>+0,15</sup>
d2	1,51	1,72	2,09	2,45	2,81	3,17	3,53	4,26
p	0,85	0,95	1,12	1,29	1,46	1,63	1,8	2,14
D	5,00 <sup>-0,48</sup>	5,50 <sup>-0,48</sup>	6,50 <sup>-0,58</sup>	7,50 <sup>-0,58</sup>	9,00 <sup>-0,58</sup>	10,00 <sup>-0,58</sup>	11,00 <sup>-0,70</sup>	13,50 <sup>-0,70</sup>
K	1,60 ±0,125	1,80 ±0,125	2,10 ±0,125	2,4 0 ±0,125	2,50 ±0,125	2,50 ±0,125	3,20 ±0,150	4,00 ±0,150
S	0,6	0,7	0,8	0,9	1	1	1,2	1,4
X max.	1,1	1,3	1,5	1,8	2	2,3	2,5	3
R max.	0,35	0,4	0,5	0,5	0,6	0,6	0,7	0,8
H-Yıldız	1	1	1	2	2	2	2	3
t min.	0,68	0,82	1,15	1,07	1,33	1,33	1,98	2,24
t max.	1,14	1,28	1,61	1,7	1,96	1,96	2,61	2,9