





DIN 7976 C ALTIKÖŞE BAŞLI SC VİDASI

DIN 7976 C
ISO 1479;
CSN 21231;
PN 83101;
UNI 6949;

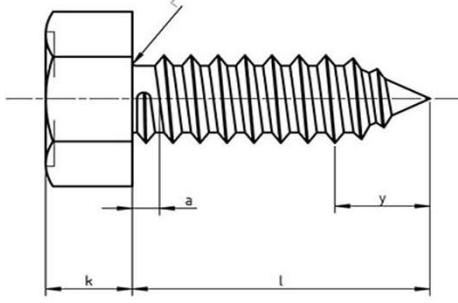

Ölçü d	2,2	2,9	3,5	3,9	4,2	4,8	-5,5	6,3
Diş Adımı	0,80	1,10	1,30	1,30	1,40	1,60	1,80	1,80
a max.	0,80	1,10	1,30	1,30	1,40	1,60	1,80	1,80
e min.	3,38	5,40	5,95	7,59	7,59	8,71	8,71	10,95
k	1,30	1,50	2,30	2,30	2,80	3,00	4,00	4,80
k min.	1,18	1,38	2,18	2,18	2,68	2,88	3,85	4,65
k max.	1,42	1,62	2,42	2,42	2,92	3,12	4,15	4,95
r max.	0,30	0,40	0,50	0,50	0,60	0,70	0,80	0,90
s max.	3,20	5,00	5,50	7,00	7,00	8,00	8,00	10,00
s min.	3,02	4,82	5,32	6,78	6,78	7,78	7,78	9,78
Type C y max.	2,00	2,60	3,20	3,50	3,70	4,30	5,00	6,00
Type F y max	1,60	2,10	2,50	2,70	2,80	3,20	3,60	3,60