





DIN 7976 F ISO 1479 ALTİKÖŞE SAC VİDASI KÜT UÇLU

DIN 7976 F  
ISO 1479;  
CSN 21231;  
PN 83101;  
UNI 6949;

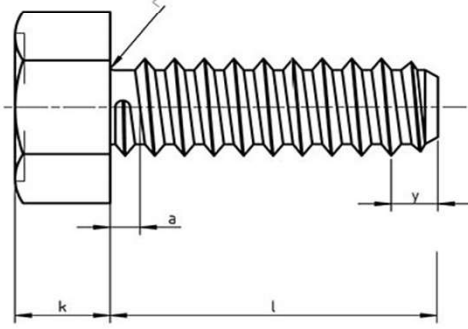

| Ölçü d        | 2,2  | 2,9  | 3,5  | 3,9  | 4,2  | 4,8  | -5,5 | 6,3   |
|---------------|------|------|------|------|------|------|------|-------|
| Diş Adımı     | 0,80 | 1,10 | 1,30 | 1,30 | 1,40 | 1,60 | 1,80 | 1,80  |
| a max.        | 0,80 | 1,10 | 1,30 | 1,30 | 1,40 | 1,60 | 1,80 | 1,80  |
| e min.        | 3,38 | 5,40 | 5,95 | 7,59 | 7,59 | 8,71 | 8,71 | 10,95 |
| k             | 1,30 | 1,50 | 2,30 | 2,30 | 2,80 | 3,00 | 4,00 | 4,80  |
| k min.        | 1,18 | 1,38 | 2,18 | 2,18 | 2,68 | 2,88 | 3,85 | 4,65  |
| k max.        | 1,42 | 1,62 | 2,42 | 2,42 | 2,92 | 3,12 | 4,15 | 4,95  |
| r max.        | 0,30 | 0,40 | 0,50 | 0,50 | 0,60 | 0,70 | 0,80 | 0,90  |
| s max.        | 3,20 | 5,00 | 5,50 | 7,00 | 7,00 | 8,00 | 8,00 | 10,00 |
| s min.        | 3,02 | 4,82 | 5,32 | 6,78 | 6,78 | 7,78 | 7,78 | 9,78  |
| Type C y max. | 2,00 | 2,60 | 3,20 | 3,50 | 3,70 | 4,30 | 5,00 | 6,00  |
| Type F y max  | 1,60 | 2,10 | 2,50 | 2,70 | 2,80 | 3,20 | 3,60 | 3,60  |