




DIN 7983 ISO 7051 YILDIZ HAVŞA BOMBE BAŞLI SAC VİDASI

DIN 7983
ISO 7051;
CSN 21239;
UNI 6956;

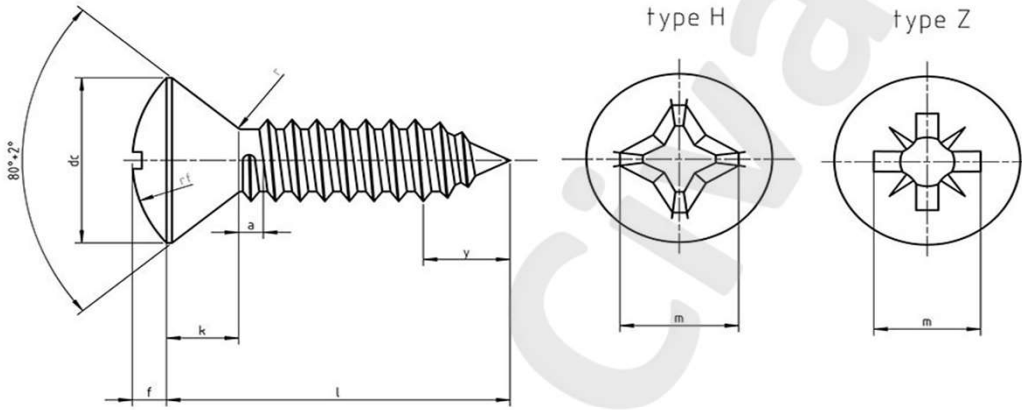

Ölçü d	2,2	2,9	3,5	3,9	4,2	4,8	5,5	6,3
Diş Adımı	0,80	1,10	1,30	1,30	1,40	1,60	1,80	1,80
a max.	0,80	1,10	1,30	1,30	1,40	1,60	1,80	1,80
dk max.	4,30	5,50	6,80	7,50	8,10	9,50	10,80	12,40
dk min.	4,00	5,20	6,44	7,14	7,74	9,14	10,37	11,97
f	0,70	0,90	1,20	1,30	1,40	1,50	1,70	2,00
k	1,30	1,70	2,10	2,30	2,50	3,00	3,40	3,80
r max.	0,80	1,10	1,40	1,50	1,60	1,90	2,10	2,40
rf	3,80	4,60	5,40	6,00	6,60	8,20	9,40	11,10
PH	1,00	1,00	2,00	2,00	2,00	2,00	3,00	3,00
Type H m	2,80	3,40	4,60	4,70	4,90	5,40	7,00	7,40
min.	1,17	1,81	1,89	2,04	2,24	2,70	3,02	3,46
max.	1,57	2,21	2,39	2,54	2,74	3,20	3,53	3,96
Type Z m	2,40	3,10	4,30	4,40	4,60	5,10	6,60	7,10
min.	1,10	1,83	1,88	2,00	2,26	2,69	2,92	3,40
max.	1,35	2,08	2,34	2,46	2,72	3,15	3,38	3,86
Type C y max	2,00	2,60	3,20	3,50	3,70	4,30	5,00	6,00
Type F y max.	1,60	2,10	2,50	2,70	2,80	3,20	3,60	3,60