





DIN 508 T PAUÇ SOMUN

DIN 508;
ISO 299;
CSN 21529;
PN 61275;

* 10K

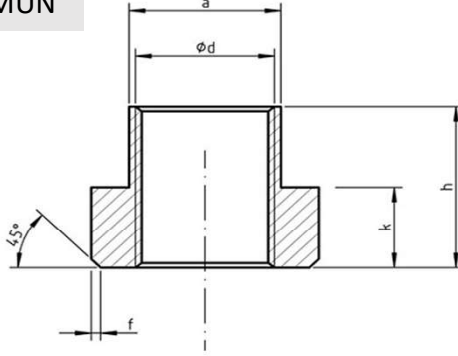

Ölçü d	M4	M5	M6	M8	M10	M12	M16	M20	M24	M30	M36	M42	M48
a	5,00	6,00	8,00	10,00	12,00	14,00	18,00	22,00	28,00	36,00	42,00	48,00	54,00
a max.	4,70	5,70	7,70	9,70	11,70	13,70	17,70	21,70	27,70	35,60	41,60	47,60	53,60
a min.	4,50	5,50	7,50	9,50	11,40	13,40	17,40	21,40	27,40	35,30	41,30	47,30	53,20
e	9,00	10,00	13,00	15,00	18,00	22,00	28,00	35,00	44,00	54,00	65,00	75,00	85,00
e min.	8,50	9,50	12,50	14,50	17,50	21,50	27,50	34,50	43,00	53,00	64,00	74,00	84,00
f	1,00	1,60	1,60	1,60	2,50	2,50	2,50	2,50	4,00	6,00	6,00	6,00	6,00
h	6,50	8,00	10,00	12,00	14,00	16,00	20,00	28,00	36,00	44,00	52,00	60,00	70,00
k	3,00	4,00	6,00	6,00	7,00	8,00	10,00	14,00	18,00	22,00	26,00	30,00	34,00
k min.	2,70	3,50	5,50	5,50	6,50	7,50	9,50	13,50	17,00	21,00	25,00	29,00	33,00
d	5,00	6,00	8,00	10,00	12,00	14,00	18,00	22,00	28,00	36,00	42,00	48,00	54,00
F min.	7,00	11,40	16,00	29,00	46,00	67,00	128,00	196,00	282,00	448,00	653,00	653,00	653,00